

3-9-00

H

Express Mail No.: EL 451 593 649 US

PENNIE & EDMONDS LLP

COUNSELORS AT LAW

3300 Hillview Avenue

Palo Alto, CA 94304

(650) 493-4935

JC553 U.S. PTO

09/521641

03/08/00

ATTORNEY DOCKET NO. 9840-039-999

Date: March 8, 2000

Assistant Commissioner for Patents

Box PATENT APPLICATION

Washington, D.C. 20231

Sir:

The following utility patent application is enclosed for filing:

Applicant(s): Adrian Freed and Todd Hodes

Executed on: Unexecuted

Title of Invention: Apparatus and Method of Additive Synthesis of Digital Audio Signals Using a Recursive Digital Oscillator


PATENT APPLICATION FEE VALUE

TYPE	NO. FILED	LESS	EXTRA	EXTRA RATE	FEE
Total Claims	13	-20	0	\$18.00 each	\$ 0.00
Independent	2	-3	0	\$78.00 each	\$ 0.00
Minimum Fee					\$ 690.00
Multiple Dependency Fee If Applicable (\$260.00)					\$ 0.00
Total					\$ 690.00
50% Reduction for Independent Inventor, Nonprofit Organization or Small Business Concern (a verified statement as to the applicant's status is attached)					- \$ 345.00
Total Filing Fee					\$ 345.00

Also enclosed:

- ☒ Unexecuted Declaration; and
- ☒ 3 sheets of informal drawings (6 figures).

Respectfully submitted,



Gary S. Williams
for William S. Galliani
PENNIE & EDMONDS LLP

31,066

(Reg. No.)
33,885

Enclosure

This form is not for use with continuation, divisional, re-issue, design or plant patent applications.

APPARATUS AND METHOD OF ADDITIVE SYNTHESIS OF DIGITAL AUDIO SIGNALS USING A RECURSIVE DIGITAL OSCILLATOR

BRIEF DESCRIPTION OF THE INVENTION

This invention relates generally to the processing of digital audio signals. More particularly, this invention relates to a technique for additive synthesis of digital audio signals using a recursive digital oscillator.

5

BACKGROUND OF THE INVENTION

Additive synthesis is a signal synthesis technique based on the Fourier Theorem. This theorem states any signal can be decomposed into a set of constituent sine waves, and that the sum of the constituents will reconstitute the original. Additive
10 synthesis is classified as a receiver-based synthesis algorithm, but differs from receiver-based schemes, such as subtractive synthesis and sampling, in that it is represented in the spectral (frequency) domain rather than the time domain.

There are many benefits in the use of additive synthesis for sound production in computer music applications. These include expressive musical control over fine
15 timbral distinctions, perceptually relevant parameterizations, sample rate independence of timber description, availability of many analysis techniques, high control bandwidth, and multiple dimensions for resource allocation/optimization.

The challenge of the additive synthesis technique is the computational intensity of the separately controllable sinusoidal partials. A single low frequency piano note
20 can require hundreds of time-varying sinusoids for accurate reproduction. Musically

effective use of additive synthesis in live performance can require the ability to control many hundreds or even thousands of sinusoidal partials in real-time.

This computational challenge is addressed by resolving two issues: which hardware architecture to use and which sinusoid generation algorithm to use on the selected architecture. Digital Signal Processors or vector processors are a good selection for the data type and associated computational demands. Unfortunately, such architectures do not always support full-range (i.e., floating-point) arithmetic; fixed point may be all that is provided. There is always a large demand for low-cost implementations. Therefore, it is desirable to be able to exploit a relatively inexpensive, moderate-precision arithmetic hardware architecture, such as a 16-bit processor.

A number of sinusoidal partial production techniques may be used on a selected hardware architecture. These techniques can be placed in three classes: those that implement recursive filters, those using table-lookup, or those that work in the transform-domain using techniques, such as the inverse fast fourier transform. The transform-domain approach is most advantageous for applications requiring many sinusoids and for which some error in phase and amplitude and some latency is acceptable. The lookup technique is the most widely used for applications requiring a few sinusoids at a very high data rate, such as radio frequency communications. Recursive oscillators have several advantages, including the inherent fine-grain exposure of data parallelism, the far more limited demand on the memory system compared to table look-ups, the lower induced latency than with a transform-domain approach, the latency flexibility, and/or the attainable phase accuracy.

The primary problem with digital recursive oscillators is managing long-term stability as rounding and truncation errors accumulate. Another problem with recursive oscillators is providing sufficient frequency coefficient resolution.

In view of the foregoing, it would be highly desirable to provide an improved technique for processing real-time partials on a general purpose hardware architecture. Ideally, the technique could be readily implemented on a moderate-precision arithmetic hardware architecture, such as a 16-bit processor. The technique should address the problem of error accumulation inherent in recursive methods. In addition, the technique should provide sufficient frequency coefficient resolution.

SUMMARY OF THE INVENTION

The method of the invention is directed toward performing additive synthesis of digital audio signals with a recursive digital oscillator. The method includes the step of receiving digital audio signal frames wherein each digital audio signal frame includes a set of frequency, amplitude, and phase components represented as coefficients of variables in a mathematical expression. Each digital audio signal frame thereby includes a frequency coefficient representation. Converted frequency coefficients are formed by linearly re-mapping bits of the frequency coefficient representation to bias audio reproduction accuracy toward low frequency signals. Additive synthesis is then performed with the converted frequency coefficients.

The method of the invention also includes receiving digital audio signal frames wherein each digital audio signal frame includes a set of frequency, amplitude, and phase components, represented as coefficients in the standard mathematical expression of the Fourier theorem; the step of converting frequency components of each digital audio signal frame to bias reproduction accuracy toward lower frequencies in the audio spectrum through the use of a re-mapping of the bits of the component and through the addition of a range-extending shift amount; and the step of performing additive synthesis via the use of an efficient recursive digital oscillator structure that uses the converted frequency coefficients internally.

The apparatus of the invention includes a computer readable memory to direct a processor to function in a specified manner. The computer readable memory includes a first set of executable instructions to receive digital audio signal frames wherein each digital audio signal frame has a set of specified frequency values expressed as a bit sequence. A second set of executable instructions transforms the bit sequence to represent lower frequencies with more significant bits and higher frequencies with less significant bits. A third set of executable instructions facilitates additive synthesis of the digital audio signal frames in a reduced-precision recursive digital oscillator. Sound is produced as multiple recursive oscillators operate in parallel.

The invention provides an improved technique for real-time production of summed variable-frequency sinusoids on a general purpose hardware architecture. The technique is readily implemented on a moderate-precision arithmetic hardware architecture, such as a 16-bit processor, but is also successfully implemented on a

variety of hardware architectures. The technique of the invention addresses the problem of error accumulation inherent in recursive oscillation, the problem of providing adequate frequency coefficient resolution inside individual oscillators, and the problem of providing computationally efficient additive synthesis on a variety of hardware platforms.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates an apparatus for implementing an embodiment of the invention.

FIGURE 2 illustrates an embodiment of the invention in the context of an analysis/re-synthesis framework, and identifies the processes in the framework that require real-time performance.

FIGURE 3 illustrates overlapping audio frames processed in accordance with an embodiment of the invention.

FIGURE 4 illustrates the partitioning of a theta term into alpha and beta components in accordance with an embodiment of the invention.

FIGURE 5 illustrates a comparison of original absolute error due to coefficient quantization error, and the modified error achieved in accordance with an embodiment of the invention.

FIGURE 6 is a detailed illustration of the modified absolute error due to coefficient quantization error achieved in accordance with an embodiment of the invention.

Like reference numerals refer to corresponding parts throughout the drawings.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 illustrates an apparatus 20 that may be used to implement an embodiment of the invention. The apparatus 20 includes the components associated with a general purpose computer. In particular, the apparatus 20 includes a processor 22, many variations of which are discussed below. The processor 22 is connected to a

set of input/output devices 24 via a bus 26. The input/output devices 24 may include such components as a keyboard, mouse, speakers, video monitor, and the like.

A memory (primary and/or secondary) 28 is connected to the bus 26. The memory 28 stores a set of executable instructions used to implement the processing of the invention. In particular, the memory 28 stores a non-real-time processing module to perform prior art processing of the type described below. In accordance with the invention, the memory 28 also stores a frequency coefficient conversion module 32. As discussed below, the frequency coefficient conversion module 32 re-maps bits of a frequency coefficient representation to bias audio reproduction accuracy at the input/output devices 24 toward low frequency signals. An additive synthesizer 34 built using a new formulation of a prior art recursive oscillation technique is then used to process the linearly re-mapped bits of the frequency coefficient representation. For the purpose of convenience, the invention is frequently described in the context of a single recursive oscillator. This reference to a single recursive oscillator contemplates the use of multiple recursive oscillators operating in parallel to produce sound, as understood from the following discussion.

The invention is directed toward the frequency coefficient conversion module 32 and the additive synthesizer 34, which efficiently creates sound based on the output of the conversion module 32. The context in which this module operates and the operations that it performs are more fully appreciated with reference to Figure 2. Figure 2 illustrates an example of a complete additive analysis/synthesis system framework. The steps to the right of the thick dashed line 50 are computed in real-time by the frequency coefficient conversion module 32 and the additive synthesizer 34. The steps to the left of the line 50 are performed by the non-real-time processing module 30.

The concept behind this particular separation is that a set of sound primitives, expressed as sets of overlap-add frames, called timbral prototypes, can be generated off-line via the non-real-time steps as part of the compositional process. Then at performance time, sets of timbral prototypes are loaded into and out of memory 28 according to a score, where they can be manipulated and combined in response to controller input from a performer operating the input/output devices 24. The modified frames are then synthesized in real-time for subsequent audition. The use of such a

paradigm enables additional degrees of freedom in performance than available through, for example, conventional sample-playback-based synthesis.

The processing associated with the present invention is directed toward the final step, that of taking a set of dynamically changing frames and synthesizing them into audio samples. The challenge of using a vector instruction set architecture is explicitly managing parallelism due to the independence of sinusoid computations. The technique of the invention exploits the natural coarse-grained parallelism by choosing to stripe state variables of sinusoids across the length of the vectors. The technique of the invention allows for implementation on a moderate-precision arithmetic unit (e.g., a 16-bit processor) using moderate-precision numeric representations. In particular, the invention provides sufficient frequency coefficient resolution by modifying a standard recursive form. The technique also reduces quantization-induced noise effects by keeping oscillators short-lived in order to exploit short-term fidelity.

The input to the frequency coefficient conversion module 32 is a series of variable-length overlap-add frames. A succession of such frames constitute a timbral prototype, which is either synthetically designed or derived through a separate analysis phase, as depicted in Figure 2. The analysis phase may include the generation of a sound (block 60) from which spectral estimation is used to produce a set of fast Fourier transforms (block 62). Pitch is then detected to produce a set of pitch estimates (block 64). The pitch estimates are then used to identify new window lengths associated with the spectral estimation. This results in a new set of fast Fourier transforms (block 66). Peak detection is performed for the new fast Fourier transforms to produce new peak estimates (block 68). Smoothing is then performed on the peaks and an overlap-add frame operation (block 70) is then initiated. The frequency coefficient and conversion module 32 then performs coefficient re-mapping and frame stitching (overlap-add frames) (block 72), as discussed below. Sound corresponding to the initial sound (block 60) may then be produced with an additive synthesizer 34 based on the recursive oscillator structure described below.

Each frame consists of a frame header and frame data. The frame header is a double-precision floating point time stamp denoting the start time of the frame and an integer denoting the number of partials in it. The frame data is a list containing the

fixed frequency, peak amplitude, and initial phase for each sinusoid in the frame, all in single-precision floating point.

At any instant of time, a timbral prototype is being synthesized as a weighted sum of two constituent frames. Each of the two sets of frame data are synthesized at a constant frequency and phase. Irrespective of their timestamps, successive frames are 50% overlapped with individual amplitude envelopes linearly increasing from zero to the specified peak amplitude value for the first overlapped portion of the frame, and linearly decreasing from this peak back to zero during the second portion of the frame. This is illustrated in Figure 3. The two sets of scaled, overlapped frame partials are summed to constitute an output channel.

An important feature of this approach is that for individual generating oscillators, the frequency, phase, and amplitude remain constant. By overlapping and adding successive oscillators with the triangular amplitude envelope, two fixed-frequency, fixed-amplitude sinusoids closely approximate a single varying-frequency, varying-amplitude partial.

As previously indicated, there are many ways to generate sinusoids. The most common methods include various recursive techniques, table look-up, and transform domain methods, such as those using the inverse fast fourier transform. The present invention relies upon recursive techniques due to their heavy reliance on explicitly parallel arithmetic with fewer time-consuming memory accesses. In accordance with an embodiment of the invention, the following digital resonator, with no damping or initialization impulse function, is used:

$$x_n = 2 \cos\left(\frac{2\pi f}{f_s}\right) x_{n-1} - x_{n-2}$$

with f_s as the sampling frequency, and $f \in (0, f_s/2)$ as the desired (constant) frequency of oscillation.

To implement this equation using only sixteen-bit fixed-point multiplies, it is necessary to (1) manage the fixed-point units with enough precision to maintain accuracy across the entire audible frequency range, while (2) taking special care to provide sufficient frequency coefficient resolution to account for human ability to distinguish subtle differences in low frequencies. Accuracy must be maintained across

$$\begin{aligned}
&= \sin(p) \cos(2\omega) - \cos(p) \sin(2\omega) \\
&= 2 \cos(\omega) \sin(p - \omega) - \sin(p) \\
&= 2 \cos(\omega) x_{-1} - \sin(p)
\end{aligned}$$

5 It may seem that this has actually increased the amount of work to be performed because there are now four trigonometric evaluations rather than three (two initialization sines plus the cosine in the recursive form). However, this approach turns out to be more efficient by allowing for the judicious sharing of intermediate values in a tandem sine and cosine generation procedure. The tandem subroutine
10 returns both $\sin(\theta)$ and $\cos(\theta)$ for $\theta \in [0, 2\pi]$ to full 32-bit fixed-point precision using a hybrid technique combining table-lookup and Taylor expansion. This keeps both the table size manageable (2048 entries of 32 bits) and the number of terms in the Taylor expansions small (two). It is implemented by separating θ into α and β as shown in Figure 4; α is the high-order 11 bits of θ , and β the remaining low-order bits. α is
15 used in an exact (to one LSB) 11-bit \rightarrow 32-bit table-lookups, while (guaranteed small) β is used in Taylor expansions.

$$\cos(\beta) \approx 1 - \frac{\beta^2}{2} \quad \text{and} \quad \sin(\beta) \approx \beta \left(1 - \frac{\beta^2}{6} \right)$$

20 The accuracy of expanding each to only two terms is guaranteed by limiting the size of β to only the low-order 21 bits of θ : the sum of the remaining terms in each expansion sequence, for all β , is less than the LSB. Finally, α and β are combined using the relationships:

$$\begin{aligned}
25 \quad \sin(\alpha + \beta) &= \sin(\alpha) \cos(\beta) + \cos(\alpha) \sin(\beta) \\
\cos(\alpha + \beta) &= \cos(\alpha) \cos(\beta) - \sin(\alpha) \sin(\beta)
\end{aligned}$$

 Attention now turns to an error analysis performed in accordance with an embodiment of the invention. Relative frequency discrimination is based on the ratio
30 of adjacent frequencies. To determine worst-case relative error, it is desirable to determine the maximum ratio between two adjacent ϵ values. Call these frequency

coefficients ϵ_1 and ϵ_2 , and their corresponding frequencies f_1 and f_2 . From the definition of w and the equation $\cos(w) = (1 - \epsilon/2)$,

5
$$\frac{f_1}{f_2} = \frac{\cos^{-1}(1 - \epsilon_1/2)}{\cos^{-1}(1 - \epsilon_2/2)}$$

Taking any two adjacent numbers in the range, one can compute f_1 and f_2 with the foregoing equation. Evaluating this ratio for all possible adjacent pairs of epsilon values allows one to determine that it is maximized for $\epsilon_1 = 4 - 2^{-14}$ and $\epsilon_2 = 4 - 2^{-13}$,
10 where $f_1/f_2 \approx 1.0010337$. This ratio is lower than the minimum frequency ratio humans are able to differentiate, a pitch difference of approximately four to five cents (about 1/25–1/20 of a semitone). The maximum error of the algorithm is actually less than two cents: $600\sqrt{2} \approx 1.001156$.

This calculation illustrates that by designing higher ϵ values to coincide with
15 higher represented frequencies, a good match of the numerical representation to the asymmetric accuracy requirements of human logarithmic pitch perception is achieved.

Two tones that are meant to have an exact ratio in their frequencies may instead generate beat frequencies due to frequency quantization. This effect, caused by *absolute error*, should be minimized.

20 Worst-case absolute error due to epsilon quantization is shown in Figure 5, which contains a side-by-side comparison below 2000 Hz for an original signal 100 and a modified signal 102. Figure 6 is a more detailed representation of the modified signal 102. As expected, the recast filter maintains more precise absolute frequency than the original form.

25 Fundamentally, more than 16 bits of fractional co-efficient are necessary to obtain 1 Hz absolute precision across the audible spectrum. The method of the invention maintains reasonable error bounds in sixteen bits of mantissa by scaling these bits with the exponent.

At each iteration of the recursive form, a small error is introduced due to
30 rounding of the multiply result. Due to the recursion, this error isn't corrected until reinitialization of the state variables. Possible effects of this include degradation of the

signal-to-noise ratio, degradation of the long-term phase accuracy, and a lack of amplitude stability—all of which can cause audible artifacts.

These problems can be corrected via additional computations, but to avoid additional computations, the invention exploits the ability to reinitialize the
5 computation at overlap-add frame boundaries, thereby allowing use of a non-self-correcting (but higher-performance) digital oscillator form described below.

In one embodiment, the invention was implemented on a neural network and signal processing accelerator board. This embodiment included a T0 chip, a 16-bit fixed point vector arithmetic core developed by the University of California at
10 Berkeley and the International Computer Science Institute. The T0 chip tightly couples a general-purpose scalar MIPS core to a high-performance vector coprocessor. T0 is representative of digital signal processing architectures in its use of fixed-point arithmetic. In order to compute summations of oscillators for additive synthesis with an overlap-add approach for a pseudo-floating-point format, four multiplies, two
15 variable shifts, two fused (constant) shifts and adds, and two regular adds are required:

$$\begin{aligned}x_n &= 2x_{n-1} - \epsilon x_{n-1} + x_{n-2} \\A_n &= A_{n-1} + \Delta A \\out_i &= out_i + A_n \times x_n\end{aligned}$$

20 A coded module implementing the foregoing expressions constitutes an additive synthesizer 34 in accordance with the invention. Observe that this additive synthesizer 34 incorporates prior art components of additive synthesis (the idea of using an analysis step followed by a re-synthesis step), and the general approach of using
25 recursive oscillators. However, the additive synthesizer 34 represents a new formulation of prior art recursive oscillation techniques in its use of a modified filter equation, its use of modified coefficient representations, and the explicit consideration of the human auditory system to provide additional computational efficiency.

On T0, the implementation of the additive synthesizer 34 requires a total of $9 +$
30 $1/n$ Vector arithmetic operations per sinusoid when unrolled n times. Unrolling four times due to trade-offs in register file pressure on T0, one achieves best-case performance of about 1.15 cycles/partial: two fixed-frequency sinusoids are required

be optimized on the basis of desired frequency and phase to most accurately and efficiently compute the approximating sinusoidal sequences.

Since transform domain methods also work well for these superscaler RISC processors, it is necessary to consider further advantages of the present invention over transform domain methods. The first advantage is computational: since in this invention the sinusoids are computed directly and individually, no cost for a final transform is incurred. This cost is especially significant when multiple independent channels of summed sinusoids are required since a transform is required for each channel. Transform domain methods cannot output elements of the output sequence until the entire transform is performed. The resulting latency is avoided in this invention because each element of the sinusoidal sequence may be stitched to its predecessor sequence and be driven as output as soon as it is computed.

Another advantage of the invention is in connection with cache memory utilization. This invention does not require a tabulated frequency domain window function at all and the triangular window function it does require for the stitching need not be tabulated as it may be computed with sufficient accuracy by accumulation. This invention therefore affords a straight-forward implementation of the window stitching operations for any sequence length. Transform domain methods favor window sizes which are powers of 2 or 3 and require considerable complexity to dynamically change window sizes.

The invention may also be implemented on processors using a Residue Number System. These processors are not widely deployed because of the high cost of conversion of numbers from traditional 2's complement representation. This problem is largely avoided with this invention since only the coefficients need to be converted for each sinusoidal sequence. The sequences themselves can be efficiently computed using Residue Number System arithmetic.

The invention may also be implemented on processors with a complex arithmetic kernel. Such processors efficiently implement a vector rotation as a single complex multiply. If the norm of a constant multiplicand is set to unity, a first-order, complex vector rotation is mathematically equivalent to a second order real coefficient system. In practice, the complex arithmetic kernel may be superior because it exhibits smaller quantization errors.

003020" 74912560

The foregoing description, for purposes of explanation, used specific nomenclature to provide a thorough understanding of the invention. However, it will be apparent to one skilled in the art that the specific details are not required in order to practice the invention. In other instances, well known circuits and devices are shown in block diagram form in order to avoid unnecessary distraction from the underlying invention. Thus, the foregoing descriptions of specific embodiments of the present invention are presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, obviously many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

IN THE CLAIMS:

1. A method of performing additive synthesis of digital audio signals in a recursive digital oscillator, comprising:
- 5 receiving digital audio signal frames wherein each digital audio signal frame includes a set of frequency, amplitude, and phase components represented as coefficients of variables in a mathematical expression, each digital audio signal frame thereby including a frequency coefficient representation;
- forming converted frequency coefficients by linearly re-mapping of bits of
- 10 said frequency coefficient representation to bias audio reproduction accuracy toward low frequency signals; and
- performing additive synthesis with said converted frequency coefficients.
2. The method of claim 1 further comprising the step of defining said frequency
- 15 coefficient representation with an exponent characterizing a floating-point range extension.
3. The method of claim 2 wherein said defining step includes the step of specifying said exponent to correspond to a right shift amount necessary to correct for
- 20 precision limitations introduced by limiting re-mapping coefficients to 16 bits.
4. The method of claim 3 wherein said receiving, forming, and performing steps are implemented utilizing a 16-bit fixed point processor.
- 25 5. The method of claim 1 wherein said receiving, forming, and performing steps are implemented utilizing a digital signal processor.
6. The method of claim 1 wherein said receiving, forming, and performing steps are implemented utilizing a field programmable gate array.
- 30 7. The method of claim 1 wherein said receiving, forming, and performing steps are implemented utilizing a Very Long Instruction Word processor.

9. The method of claim 1 wherein said receiving, forming, and performing steps are implemented utilizing a Residue Number System processor.

10. A computer readable memory to direct a processor to function in a specified manner, comprising:

10 a first set of executable instructions to receive digital audio signal frames
 wherein each digital audio signal frame has a set of specified frequency values
 expressed as a bit sequence;

a second set of executable instructions to transform said bit sequence to represent lower frequencies with more significant bits and higher frequencies with less significant bits; and

15 a third set of executable instructions to facilitate additive synthesis of said digital audio signal frames in a reduced-precision recursive digital oscillator.

11. The computer readable memory of claim 10 wherein said first set of executable
instructions include instructions to identify a frequency coefficient representation of
20 said specified frequency.

12. The computer readable memory of claim 11 further comprising a fourth set of executable instructions to define said frequency coefficient representation with an exponent characterizing a floating-point range extension.

25

13. The computer readable memory of claim 12 wherein said fourth set of executable instructions include instructions to specify said exponent to correspond to a right shift amount necessary to correct for precision limitations introduced by a reduce precision processor.

	1970	1980	1990	2000	2006
GDP per capita (constant LCU prices)	1,000	1,000	1,000	1,000	1,000
Population (millions)	100	100	100	100	100
Total population (millions)	100	100	100	100	100
Urban population (millions)	10	10	10	10	10
Rural population (millions)	90	90	90	90	90
Life expectancy at birth (years)	50	50	50	50	50
Fertility rate (children per woman)	5.0	5.0	5.0	5.0	5.0
Mortality rate (per 1,000 live births)	100	100	100	100	100
Infant mortality rate (per 1,000 live births)	100	100	100	100	100
Child mortality rate (per 1,000 live births)	100	100	100	100	100
Adult mortality rate (per 1,000 live births)	100	100	100	100	100
Health expenditure (LCU million)	100	100	100	100	100
Government health expenditure (LCU million)	100	100	100	100	100
Private health expenditure (LCU million)	100	100	100	100	100
Out-of-pocket expenditure (LCU million)	100	100	100	100	100
Health expenditure as % of GDP	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of GDP	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of GDP	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of GDP	1.0	1.0	1.0	1.0	1.0
Health expenditure as % of total expenditure	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of total expenditure	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of total expenditure	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of total expenditure	1.0	1.0	1.0	1.0	1.0
Health expenditure as % of household consumption	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of household consumption	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of household consumption	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of household consumption	1.0	1.0	1.0	1.0	1.0
Health expenditure as % of government revenue	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of government revenue	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of government revenue	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of government revenue	1.0	1.0	1.0	1.0	1.0
Health expenditure as % of total revenue	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of total revenue	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of total revenue	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of total revenue	1.0	1.0	1.0	1.0	1.0
Health expenditure as % of total resources	1.0	1.0	1.0	1.0	1.0
Government health expenditure as % of total resources	1.0	1.0	1.0	1.0	1.0
Private health expenditure as % of total resources	1.0	1.0	1.0	1.0	1.0
Out-of-pocket expenditure as % of total resources	1.0	1.0	1.0	1.0	1.0

5

10

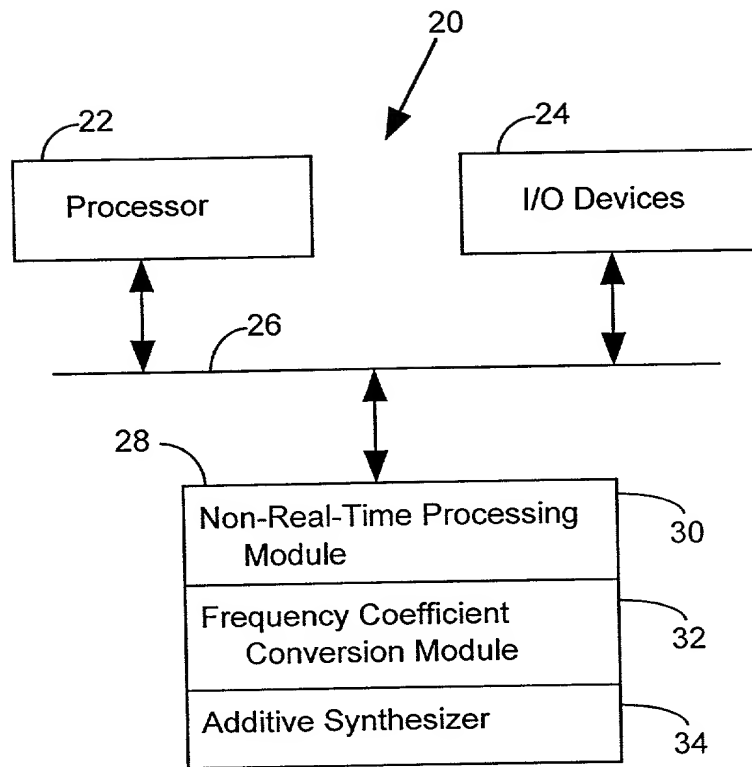


Figure 1

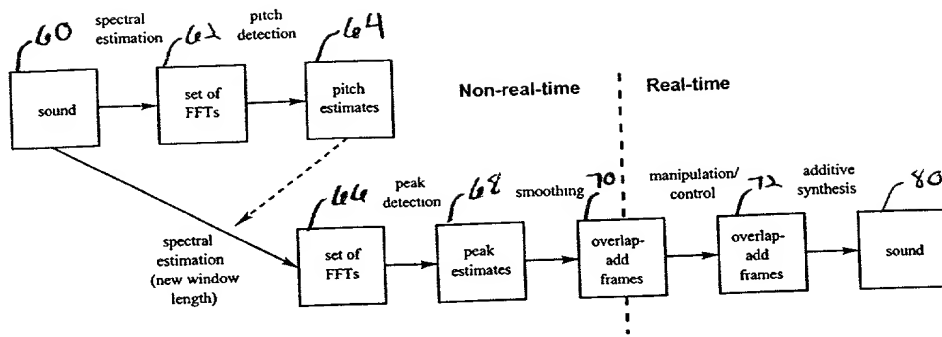


Fig. 2

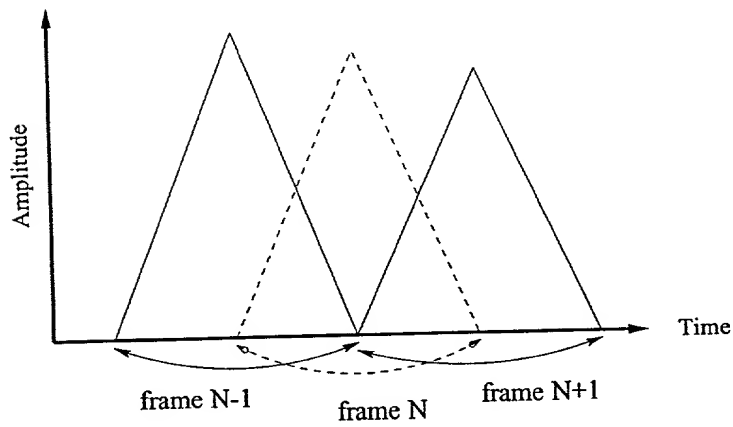


Fig. 3

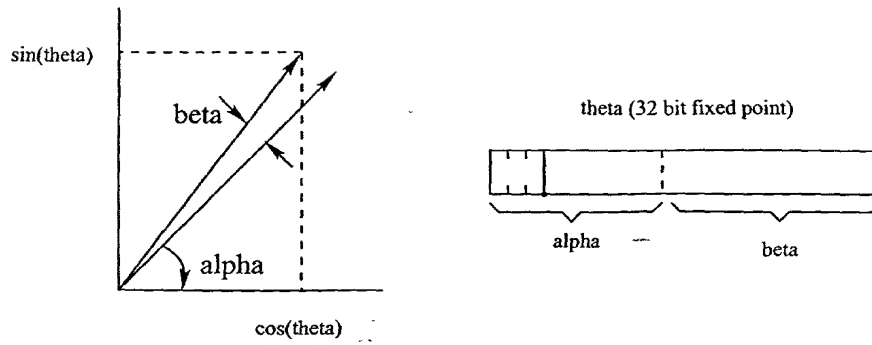


Fig. 4

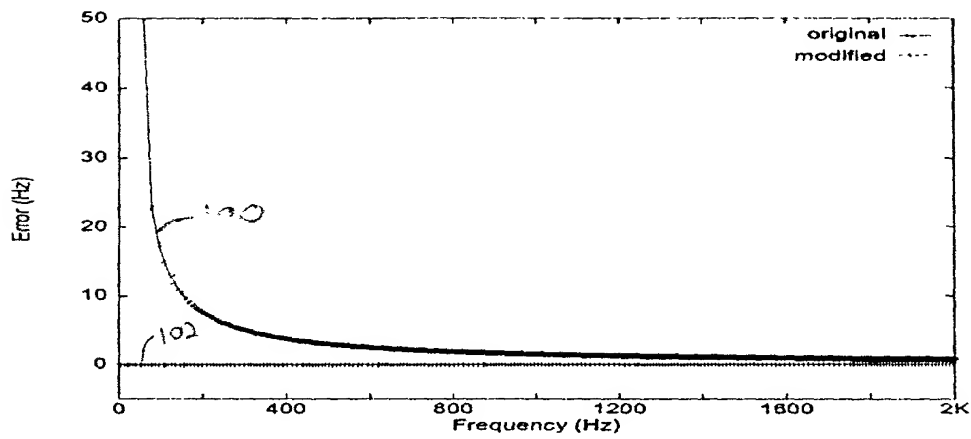


Fig. 5

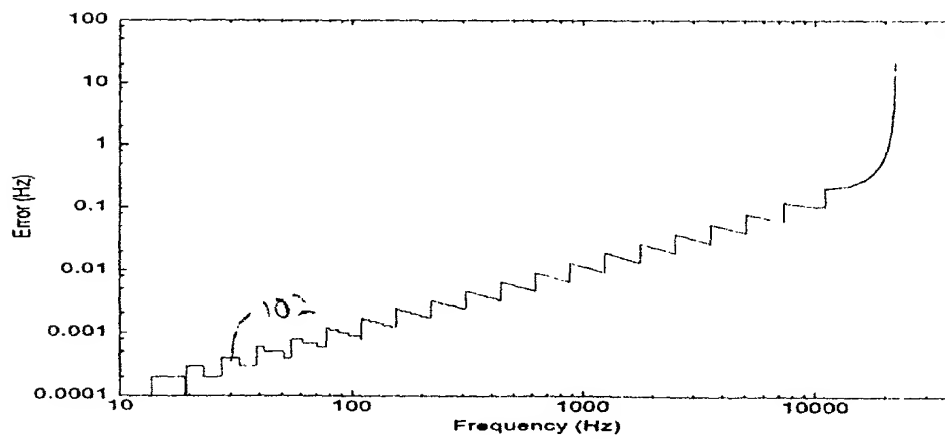


Fig. 6

DECLARATION FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ***Apparatus and Method of Additive Synthesis of Digital Audio Signals Using a Recursive Digital Oscillator*** the specification of which

☒ is attached hereto.

☐ was filed on _____ as
Application Serial No. _____
and was amended on _____. (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
_____	_____	_____	Yes <input type="checkbox"/> No <input type="checkbox"/>
(Number)	(Country)	(Date Filed)	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

60/124,273
(Application Serial No.)

03/11/99
(Filing Date)

Direct all telephone calls to William S. Galliani at (650) 493-4935. Address all correspondence to:

PENNIE & EDMONDS LLP
3300 Hillview Avenue
Palo Alto, CA 94304

File No. 9840-039-999

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Adrian Freed
Inventor's signature: _____
Date: _____
Residence: 1608 Martin Luther King, Jr. Way, Berkeley, CA 94709
Citizenship: USA
Post Office Address: 1608 Martin Luther King, Jr. Way
Berkeley, CA 94709

Full name of second joint inventor, if any: Todd Hodes
Inventor's signature: _____
Date: _____
Residence: 770 Santa Barbara Road, Berkeley, CA 94707
Citizenship: USA
Post Office Address: 770 Santa Barbara Road
Berkeley, CA 94707